


1394 MAESTRO STOOL SERIES

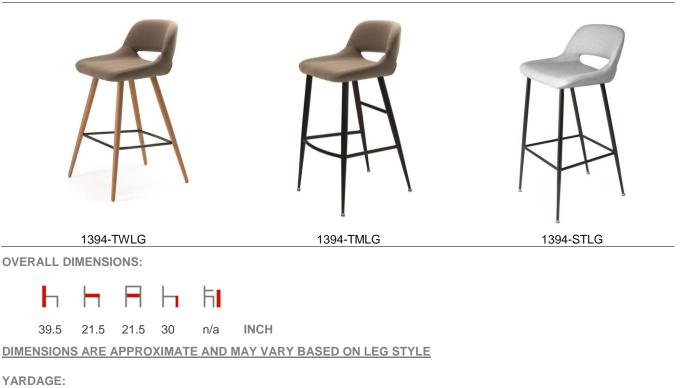

COM: 1.5 yards per chair (based on non-directional, no-repeat material) *This Item requires memo sample for approval prior to production*

SPECIFICATION:

- Stool starts with a cold molded foam shell, which is made from a metal frame injected with PU foam.
- Shell seat is wrapped in 1/4" high density CAL 117 FR foam. Shell is then wrapped in Dacron.
- Legs available in TMLG (Tapered Metal Legs), Slim Tapered Metal Leg (STLG) and TWLG (Tapered Wood Legs):
 - **Tapered Metal Legs (TMLG)** version is manufactured using Ø38 mm, 16 gauge steel tube. Leg is Ø38 mm at the top and tapers down to Ø16 mm. Available in any standard ISA powder coat finish and any standard ISA plated finish (prices vary).
 - Slim Tapered Metal Legs (STLG) version is manufactured using Ø25 mm, 16 gauge steel tube. Leg is Ø25 mm at the top and tapers down to Ø16 mm. Available in any standard ISA powder coat finish and any standard ISA plated finish (prices vary).
 - **Tapered Wood Legs (TWLG)** are tapered and made from Ash wood. Leg is Ø40 mm at the top tapering down to Ø25 mm. Available in any standard ISA wood finish. It includes a foot ring, which can be finished in Black powder coat, Polished Chrome or Satin Chrome.
- All versions available in 24" Seat Height (counter height).