


1433 LIMA BAR

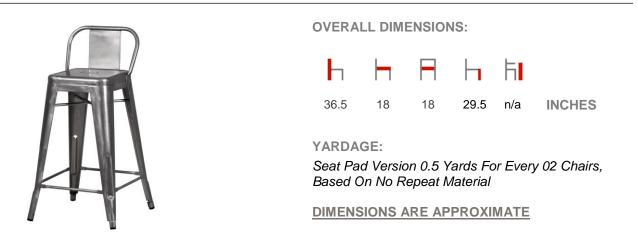

SPECIFICATION:

- Chair frame shall be constructed from 16 gauge formed metal 1 1/2" at the top tapering down to 1 ¼" at the bottom.
- The frame is welded together with a 16ga. X 1.5" metal strap and X rod support under the seat.
- Footrest/stretchers support the legs and add strength to the lower legs.
- Bottoms of legs are capped with plastic chair glides.
- Seats available as:

-Metal Seat (MS) with hand hold.

-Upholstered Seat Pad (USP), with 1/5" thick high density foam, meeting CAL-117 FR.

• Metal frame available in gunmetal.