


451 AMALFI CHAIR SERIES

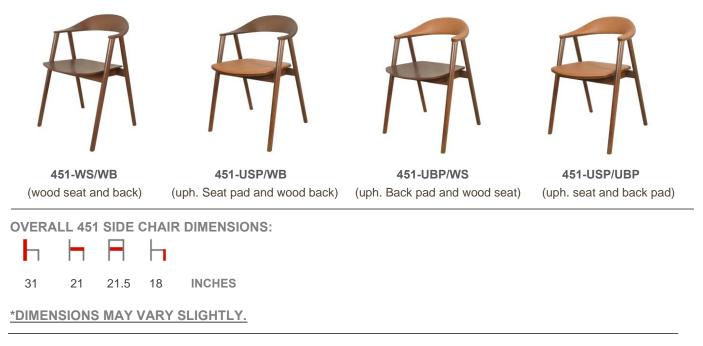

COM YARDAGE:

451-USP/WB (seat pad, wood back): 0.5 yard for every 02 chairs (based on no repeat, non-directional material) 451-UBP/WB (back pad, wood seat): 0.5 yard for every 02 chairs (based on no repeat, non-directional material) 451-UBP/USP (back pad, seat pad): 1 yard per chair (based on no repeat, non-directional material)

SPECIFICATION:

- Chair frames are constructed of solid kiln dried ash wood. Lumber to be dried to a final moisture content level between 6% 8%.
- The frames are connected together by dowels, corner blocks, screws and glue.
- Legs are1.5" diameter at the top, tapering down to 1" diameter at the bottom.
- The seat consists of ¹/₂" thick plywood and is attached to the main frame via screws and glue.
- The back rest consists of 1/2" thick bent plywood and is attached to the main frame via screws and glue.
- The seat and back pad (when applicable) are approximately ½" thick and consist of pliable wood board, covered in high-density foam, meeting CAL 117 FR. Upholstery is then applied as specified.
- All exposed wood can be finished in any standard ISA wood finish. Frames then receive a clear urethane top coat in low gloss for added protection.
- All chairs include nail-in nylon glides suitable for most flooring types.

46 Dufflaw Road Toronto ON M6A 2W1 | 416-782-9100 | 1-800-881-3928 | www.havaseat.com | isa@havaseat.com